

# Self-Supervised Regression Of sEMG Signals Combining Non-Negative Matrix Factorization With Deep Neural Networks For Robot Hand Multiple Grasping Motion Control

Roberto Meattini, Alessio Caporali, Alessandra Bernardini, Gianluca Palli and Claudio Melchiorri

**Abstract**—Advanced Human-In-The-Loop (HITL) control strategies for robot hands based on surface electromyography (sEMG) are among major research questions in robotics. Due to intrinsic complexity and inaccuracy of labeling procedures, unsupervised regression of sEMG signals has been employed in literature, however showing several limitations in realizing multiple grasping motion control. In this work, we propose a novel Human-Robot interface (HRI) based on *self-supervised* regression of sEMG signals, combining Non-Negative Matrix Factorization (NMF) with Deep Neural Networks (DNN) in order to both avoid explicit labeling procedures and have powerful nonlinear fitting capabilities. Experiments involving 10 healthy subjects were carried out, consisting of an offline session for systematic evaluations and comparisons with traditional unsupervised approaches, and an online session for assessing real-time control of a wearable anthropomorphic robot hand. The offline results demonstrate that the proposed self-supervised regression approach overcame traditional unsupervised methods, even considering different robot hands with dissimilar kinematic structures. Furthermore, the subjects were able to successfully perform online control of multiple grasping motions of a real wearable robot hand, reporting for high reliability over repeated grasp-transportation-release tasks with different objects. Statistical support is provided along with experimental outcomes.

**Index Terms**—Multifingered Hands; Intention Recognition; Human Factors and Human-in-the-Loop.

## I. INTRODUCTION

Human-Robot interfaces (HRI) have been studied for applications of telemanipulation, prosthetics and programming by demonstration [1]. In this context, several works have investigated the decoding of surface skin electromyography (sEMG) to realize HRI for human-in-the-loop (HITL) robot hand grasping control. In recent decades, research efforts have been mostly dedicated to investigating the exploitation of pattern recognition based machine learning to achieve more natural and intuitive HRI based on muscular activation [2]. Specifically, one methodology consists in classifying sEMG signals in order to produce discrete commands for the activation of different grasping actions on the robot hand, resulting in very good classification accuracy ( $> 95\%$ ) even when controlling more than ten grasping motions [2]. However,

classification presents inherent reliability issues, particularly related to the unpredictability of misclassifications and the increasing of complexity with the number of considered grasping actions/motions. In response, simultaneous and proportional (s/p) control has more recently taken center stage in the research community [3], which relies on exploiting regression models to map sEMG signals into continuous motions of multiple robot hand grasps [4]. The core advantage of s/p HRI is that facilitates the user to react in face of mapping inaccuracies/unpredicted motions, thanks to the continuous nature of the modifiable robot hand inputs. A major issue of s/p approaches is that – when they are implemented in a *supervised* fashion – they require an sEMG data collection and explicit labeling in order to train the regression model. Note that, since in this work we are interested in s/p control enforced by means of regression of sEMG signals, the kind of labelling we refer to is any instant-by-instant continuous labelling of the sEMG signal denoting the grasping motions that are desired to be controlled on a robot hand. Unfortunately, labeling of sEMG signals for telemanipulation purposes is a tedious and frustrating procedure that is critical for the user. Furthermore, several systematic labeling imprecisions cannot be avoided, due to well-known difficulties in labeling biological data [5].

In order to bypass these limitations, unsupervised regression approaches have been explored. State-of-the-art approaches have typically exploited the synergistic organization of the human motor control system, assuming that the sEMG signals are the result of a mixture obtained by the product of a basis matrix (the *muscular synergies matrix*) with an encoding vector (the *motor drives vector*). In this context, unsupervised regression has been successfully realized by applying Non-negative Matrix Factorization (NMF) to unlabelled sEMG training data [6], [7]. However, a very limiting assumption of the traditional NMF-based approach is that different motions must correspond to motor drives vectors belonging to (mostly) orthogonal subspaces [8]. Unfortunately, such assumption is not going to be fulfilled in practice, due to the complexity of musculo-tendon mechanisms in the execution of multiple grasping motions. This implies specific single target hand motions to be representable by linear combinations of muscular synergy vectors corresponding to other interfering motions, bringing the regression output to be unreliable for robot hand control. Importantly, these limitations can be seen as a consequence of the intrinsic absence of nonlinear fitting capabilities of unsupervised approaches. More recently, variants of the traditional NMF-based approach considering sparsity-constraints [9], time-varying muscular synergies [10] and autoencoders [11] have been proposed, without however resolving the performance drop when in presence of multiple

Manuscript received: May, 12, 2023; Revised August, 20, 2023; Accepted October, 12, 2023.

This paper was recommended for publication by Editor Jee-Hwan Ryu upon evaluation of the Associate Editor and Reviewers' comments. This work was supported by the European Commission's Horizon Europe Framework Programme with the project IntelliMan (Grant Agreement 101070136), and by MUR with the project "Sustainable Mobility Center" (code: CN00000023 - CUP J33C22001120001).

The authors are with the Department of Electrical, Electronic, and Information Engineering (DEI), University of Bologna, 40136 Bologna, Italy (e-mail: {roberto.meattini; alessio.caporali2; alessandr.bernardini5; gianluca.palli; claudio.melchiorri}@unibo.it).

grasping motions. For this reason, in this study traditional NMF-based approaches are considered for comparison.

In this work, a novel HRI based on self-supervised regression of sEMG signals for HITL robot grasp control is presented. Specifically, we demonstrate that NMF can be used to compute the labels to be provided to a Deep Neural Network (DNN) [12] architecture to reliably map sEMG signals into robot hand control inputs, even in presence of multiple grasping motions. Experimentations were performed recruiting two groups of five subjects in offline and online sessions, respectively, see Fig. 1. In the offline experimental session, the regression capabilities of traditional NMF-based approaches were compared with the self-supervised method, demonstrating the improved performance of the proposed solution. Also, systematic evaluations on three different simulated robot hands with dissimilar kinematic structures were carried out, supported by statistical analyses. In the online session, the involved subjects performed real-time control of a wearable robot hand, reporting for smooth and highly repeatable regulations of the grasps during multiple object grasp-transportation-release tasks, also providing statistical support for the reliability of the system. The paper is organized as follows: Sec. II presents robot hands control strategy, traditional NMF-based approaches and proposed self-supervised method; Sec. III reports the offline and online experiments descriptions and results; Sec. IV discusses work implications, results comparisons and possible limitations; finally, Sec. V draws the conclusions.

## II. MATERIALS AND METHODS

### A. Setup

1) *sEMG Signal Acquisition*: The 8-channel wearable sEMG armband gForcePro (see Fig. 1) by OYMotion was used to acquire sEMG signals from the forearm muscles of the user. The armband was positioned in proximity of the bellies of the *Flexor Digitorum Superficialis* and *Extensor Digitorum Communis* muscles, following the guidelines outlined in [13]. Raw sEMG signals were acquired at 1 kHz via a built-in Bluetooth interface, and transmitted to a nearby PC. A processing chain was then applied to each sEMG channel, consisting of a 50 Hz notch filter to eliminate powerline interference, a 20 Hz highpass filter to remove baseline noise and, finally, the computation of the root mean square (RMS) value over a 200 ms sliding window.

2) *Robot Hands And Controller*: The robotic grasping device used for the online experiments was the AR10 Robot Hand by Activat8 Robots, a lightweight anthropomorphic robot hand with 5 fingers and 10 degrees-of-freedom (DoFs). The AR10 servomotors were controlled at low-level via a Robot Operating System (ROS) interface. Considering that the AR10 presents  $n_J = 10$  joints (2 joints per finger), let us denote with  $q^{\text{ref}}(t) \in \mathbb{R}^{n_J}$  the vector of reference joint angles. In this study, the robot hand was controlled in such a way to allow the regulation of the closure level of  $n_G = 3$  different grasping motions corresponding to power, tripodal and ulnar grasps (see Fig. 1). The criteria for the choice of these grasping motions regards the selection of three volar grasps characterized by different Virtual Finger (VF) configurations, begin the VF defined as a functional

unit comprised of at least one real physical finger (which may include the palm) acting in unison to apply opposing forces on the object and against the other VFs in a grasp [14]. In particular, for the power grasp, three VFs are involved: (VF1) the palm, (VF2) the thumb and (VF3) the index-middle-ring-little fingers; whereas, for the tripodal and ulnar grasps, the (VF3) was associated with the index-middle fingers and ring-little fingers, respectively. Specifically, the AR10 joint references were imposed as

$$q^{\text{ref}}(t) = S\alpha(t), \quad (1)$$

where  $S \in \mathbb{R}^{n_J \times n_G}$  is the grasp synergy matrix and  $\alpha(t) = [\alpha_1(t) \ \alpha_2(t) \ \alpha_3(t)]^T \in \mathbb{R}^{n_G}$  is the vector of synergy activations, with  $n_G$  the number of grasping motions. In particular, in order to allow the regulation of the closure level of power, tripodal and ulnar grasps, the grasp synergy matrix  $S$  was computed in accordance with the concept of postural synergies [15], as detailed in the following. A matrix collecting four hand configurations,  $Q \in \mathbb{R}^{n_J \times 4}$ , was built, defined as  $Q = [q_{\text{OH}} \ q_{\text{PW}} \ q_{\text{TR}} \ q_{\text{UL}}]$ , in which  $q_{\text{OH}}$ ,  $q_{\text{PW}}$ ,  $q_{\text{TR}}$ ,  $q_{\text{UL}} \in \mathbb{R}^{n_J}$  are the vectors of joint angles for the open hand (OH) configuration and the configurations corresponding to the maximum closure level of power (PW), tripodal (TR) and ulnar (UL) grasps, respectively (see Fig. 1). Then, the matrix  $S \in \mathbb{R}^{n_J \times n_G}$  ( $n_G = 3$ ) is obtained by performing the Principal Component Analysis (PCA) on  $Q$ . From the PCA, the principal components  $s_1, s_2, s_3 \in \mathbb{R}^{n_J}$  are obtained, corresponding to the orthogonal directions of maximum variance of the configurations collected in  $Q$ , and the grasp synergy matrix was then built as  $S = [s_1 \ s_2 \ s_3]$ . In this way, by defining the vectors of synergy activations corresponding to the maximum closure level of power, tripodal and ulnar grasps as  $\alpha_{\text{PW}}$ ,  $\alpha_{\text{TR}}$ ,  $\alpha_{\text{UL}} \in \mathbb{R}^{n_G}$ , respectively, their values can be computed as

$$\alpha_{\text{PW}} = S^+ q_{\text{PW}}, \quad \alpha_{\text{TR}} = S^+ q_{\text{TR}}, \quad \alpha_{\text{UL}} = S^+ q_{\text{UL}}, \quad (2)$$

where  $S^+$  is the pseudo-inverse of the matrix  $S$ . In this way, eq. (1) can be used for robot hand grasp control based on sEMG signals as will be detailed in Sec. II-B. Note that postural synergies have been largely investigated in literature: in [15], postural synergies were treated from the point of view of a geometrical tool to structure the human hand behaviour for robot hands design and control, whereas, in [16], the role of postural synergies for robotic grasping quality, robustness and force regulation was investigated. In this study, the concept of postural synergies is exploited to embed robot hand configurations in a lower dimensional space with respect to the full-dimensional joint space, in order to be able to develop a less complex sEMG regression model for improved performance (see Sec. II-C.) Furthermore, also three simulated robot hands were considered for an offline study, see Sec. III-B. The considered additional robot hands were: (i) a ROS-based simulator of the AR10; (ii) a SynGrasp-based [17] simulator of the University of Bologna Hand IV (UBHand) [18], an anthropomorphic fully-actuated robot hand with 15 DoFs; and (iii) a SynGrasp-based simulator inspired to the Barrett Hand [19], a 3-fingered robotic gripper with 8 DoF (see Fig. 1). In particular, for these additional simulated robot hands the same controller as the one introduced in eq.s (1)-(2) was used, by considering the specific values of  $n_J$  in eq. (1) and

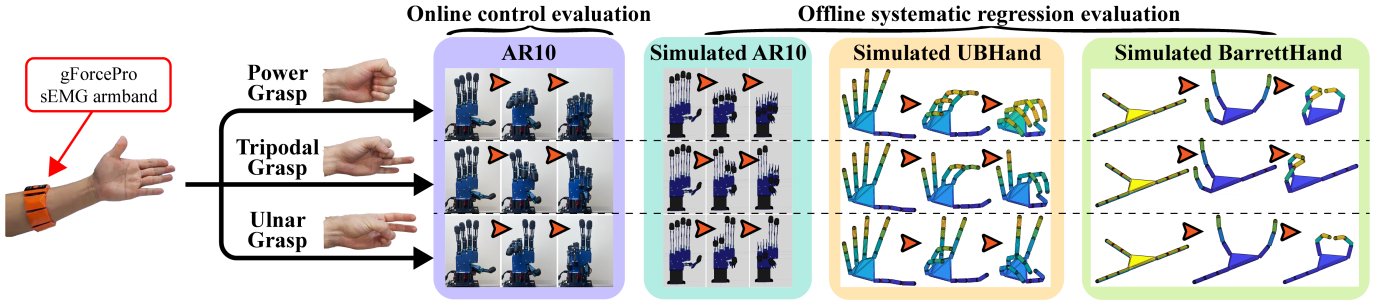


Fig. 1: Schematic representation of the sEMG-based robot hand multi-grasp control realized in this study.

joint configurations in eq. (2) for the simulated hands. Note that, even if more general procedures have been proposed for mapping human hand motions on non-anthropomorphic robot hands [20], in this study the definition of the matrix  $Q$  for the BarretHand-inspired robotic gripper was done by a simple heuristic association of four predefined joint configurations of the gripper – namely  $q_{OH}$ ,  $q_{PW}$ ,  $q_{TR}$ ,  $q_{UL}$  – that were desired to correspond to the open hand, closed power grasp, closed tripodal grasp and closed ulnar grasp configurations of the user's hand, respectively. In our specific case (see Fig. 1) we associated:  $q_{OH}$  with the gripper configuration with all fingers extended;  $q_{PW}$  with the configuration with all fingers flexed;  $q_{TR}$  with the configuration with only the first and second fingers flexed; and, finally,  $q_{UL}$  with the configuration with only the first and third fingers flexed.

### B. Traditional NMF-based Unsupervised Regression Approaches for Robot Grasp Control

1) *Single Grasping Motion Regression Via NMF*: Aiming at performing an sEMG-based unsupervised regression of a single grasp, let us consider a user executing the specific grasping motion of interest while an 8-channel sEMG signal (see Sec. II-A1) training set of  $d$  samples is recorded and collected in the matrix  $\bar{E} \in \mathbb{R}^{8 \times d}$ . The matrix  $\bar{E}$  can be written as the mixture [6]

$$\bar{E} = W \bar{H} \quad (3)$$

where  $W \in \mathbb{R}^{8 \times 2}$  is the muscular synergy matrix and  $\bar{H} \in \mathbb{R}^{2 \times d}$  is the motor drive matrix. In particular,  $W$  and  $\bar{H}$  can be written as

$$W = [w_e \ w_f], \quad \bar{H} = [\bar{h}_e^T \ \bar{h}_f^T]^T, \quad (4)$$

where  $w_e, w_f \in \mathbb{R}^8$  and  $\bar{h}_e, \bar{h}_f \in \mathbb{R}^d$  are the extension and flexion components of the muscular synergy and motor drives matrices, respectively. In order to estimate  $W$  and  $\bar{H}$ , the NMF can be applied to the training set  $\bar{E}$ . However, among  $W$  and  $\bar{H}$ , we are mostly interested in the estimated muscular synergy matrix  $W$ , because it can be then exploited to online compute the vector of instantaneous motor drives  $H(t) = [h_e(t) \ h_f(t)]^T \in \mathbb{R}^2$  (note that  $H(t)$  differs from  $\bar{H}$ , since it denotes the instantaneous motor drives) as

$$H(t) = W^+ E(t) \quad (5)$$

where  $W^+$  is the pseudo-inverse matrix of  $W$  and  $E(t) = [e_1(t) \dots e_8(t)]^T \in \mathbb{R}^8$  is the vector of the online sEMG signal. Finally, the grasp closure level  $\sigma(t)$  is obtained as

$$\sigma(t) = \frac{k_1}{2} h_e(t) - \frac{k_2}{2} h_f(t) + k_3, \quad (6)$$

where, by properly setting the scaling factors  $k_1, k_2$  in order to normalize  $\bar{h}_e$  and  $\bar{h}_f$  in eq. (4) and  $k_3 = 1$ ,  $\sigma(t)$  is scaled in

the range  $[0, 1]$ . It is then possible to control a single specific grasping motion of the robot hand imposing, in eq. (1),

$$\alpha(t) = \begin{cases} \alpha_{PW} \sigma(t), & \text{for only power grasp regulation,} \\ \alpha_{TR} \sigma(t), & \text{for only tripodal grasp regulation,} \\ \alpha_{UL} \sigma(t), & \text{for only ulnar grasp regulation,} \end{cases} \quad (7)$$

where  $\alpha_{PW}$ ,  $\alpha_{TR}$  and  $\alpha_{UL}$  have been introduced in eq. (2). Therefore, by defining the robot hand control input as in eq. (7), the closure level of power, tripodal or ulnar grasps can be controlled singularly from online sEMG signals ( $\bar{E}$  needs to be recorded accordingly), without the possibility of multi-grasp control. We refer to this unsupervised sEMG regression approach as “single-NMF”.

2) *Multiple Grasping Motions Regression Via NMF*: In the general case, we want now to use the NMF for the regression of  $N$  different grasping motions. According to the traditional approach, the procedure requires that for each generic  $n$ -th grasping motion ( $1 \leq n \leq N$ ), the matrix  $\bar{E}_n$  collecting the sEMG signal training set recorded during the execution by the user of the only  $n$ -th grasping motion is considered. The related muscular synergy matrix  $W_n$  is then estimated independently from the other grasping motions applying the NMF to  $\bar{E}_n$ , and therefore estimating, in total,  $n$  muscular synergy. The muscular synergy matrix  $W$  for all grasping motions is then built by concatenating the single muscular synergy matrices of each specific grasping motion:

$$W = [W_1 \ W_2 \ \dots \ W_n \ \dots \ W_N]. \quad (8)$$

Therefore, it is possible to consider the pseudo-inverse matrix  $W^+$  of the matrix  $W$  as given by eq. (8), and it is possible to exploit eq.s of the form of (5)-(6) to compute the grasp closure levels for each of the  $n$  considered grasping motions. Coming back to the case considered in this study of power (PW), tripodal (TR) and ulnar (UL) grasps, three calibration matrices  $\bar{E}_{PW}$ ,  $\bar{E}_{TR}$  and  $\bar{E}_{UL}$  have to be collected, for which three muscular synergy matrices  $W_{PW}$ ,  $W_{TR}$  and  $W_{UL}$  are estimated, respectively. Thereafter,  $W$  is built according to eq. (8), and the three grasp closure levels  $\sigma_{PW}(t)$ ,  $\sigma_{TR}(t)$  and  $\sigma_{UL}(t)$  are computed as

$$\sigma_i(t) = \frac{k_{1,i}}{2} h_{e,i}(t) - \frac{k_{2,i}}{2} h_{f,i}(t) + k_{3,i}, \quad (9)$$

where  $i = \{PW, TR, UL\}$ ,  $\sigma_i(t) \in [0, 1]$ , and  $h_{e,i}(t)$  and  $h_{f,i}(t)$  are computed from the online instantaneous values of the sEMG signal  $E(t)$  as

$$\begin{aligned} [h_{e,PW}(t) \ h_{f,PW}(t) \ h_{e,TR}(t) \ h_{f,TR}(t) \ h_{e,UL}(t) \ h_{f,UL}(t)]^T = \\ = W^+ E(t) = [W_{PW} \ W_{TR} \ W_{UL}]^+ E(t), \end{aligned} \quad (10)$$

where terms in eq.s (9) and (10) have an analogous meaning as in eq.s (6) and (5). The sEMG-based robot hand multi-grasp control is then obtained imposing, in eq. (1),

$$\alpha(t) = \alpha_{PW}\sigma_{PW}(t) + \alpha_{TR}\sigma_{TR}(t) + \alpha_{UL}\sigma_{UL}(t). \quad (11)$$

In the following, we refer to this multi-grasp unsupervised regression approach as “concatenated-NMF”.

### C. Proposed Self-Supervised Regression Of sEMG Signals For Robot Hand Multi-Grasp Control

We propose an approach based on a DNN, which is trained in a self-supervised fashion by means of a proper application of NMF. Let us consider  $N$  different grasping motions, and the user executing a generic grasping motion  $n$  ( $1 \leq n \leq N$ ). Accordingly, a matrix  $\bar{E}_n$  is defined as the matrix collecting the sEMG signal samples recorded during the execution by the user of the grasping motion  $n$ . In this way, a total of  $N$  matrices  $\bar{E}_1 \in \mathbb{R}^{8 \times d_1}, \dots, \bar{E}_N \in \mathbb{R}^{8 \times d_N}$  is available. Thereafter, NMF is applied to each matrix  $\bar{E}_n$  in order to estimate the relative muscular synergy matrix  $W_n$ . Instead of concatenating the  $N$  synergy matrices  $W_1, \dots, W_N \in \mathbb{R}^{8 \times N}$  to form a new matrix as in the concatenated-NMF approach, we use them to compute the *offline estimated motor drive matrices*  $\hat{H}_1 \in \mathbb{R}^{N \times d_1}, \dots, \hat{H}_N \in \mathbb{R}^{N \times d_N}$  as

$$\hat{H}_i = \begin{bmatrix} \hat{h}_{e,i} \\ \hat{h}_{f,i} \end{bmatrix} = W_i^+ \bar{E}_i, \quad i = \{1, \dots, N\}. \quad (12)$$

Then, with a similar reasoning as in eq. (6), we can obtain the *offline estimated grasp closure level vectors*  $\hat{\sigma}_1 \in \mathbb{R}^{1 \times d_1}, \dots, \hat{\sigma}_N \in \mathbb{R}^{1 \times d_N}$  as

$$\hat{\sigma}_i^T = \frac{k_{1,i}}{2} \hat{h}_{e,i}^T - \frac{k_{2,i}}{2} \hat{h}_{f,i}^T + k_{3,i}, \quad i = \{1, \dots, N\}. \quad (13)$$

Moving to the case considered in this study of power (PW), tripodal (TR) and ulnar (UL) grasps, eq. (13) becomes

$$\hat{\sigma}_i^T = \frac{k_{1,i}}{2} \hat{h}_{e,i}^T - \frac{k_{2,i}}{2} \hat{h}_{f,i}^T + k_{3,i}, \quad i = \{PW, TR, UL\}, \quad (14)$$

where terms in eq.s (14) have an analogous meaning as in eq.s (6). Since  $\hat{\sigma}_{PW}$ ,  $\hat{\sigma}_{TR}$  and  $\hat{\sigma}_{UL}$  in eq. (14) correspond to the calibration matrices  $\bar{E}_{PW}$ ,  $\bar{E}_{TR}$  and  $\bar{E}_{UL}$ , respectively, they represent an (offline) estimation of the grasp closure level for the power (PW), tripodal (TR) and ulnar (UL) grasps, without any ambiguity of overlapping grasping motions. This allows to define an sEMG training set  $\bar{E}_T$  as

$$\bar{E}_T = [\bar{E}_{PW} \quad \bar{E}_{TR} \quad \bar{E}_{UL}] \in \mathbb{R}^{8 \times (d_{PW} + d_{TR} + d_{UL})}, \quad (15)$$

and corresponding label  $T \in \mathbb{R}^{3 \times (d_{PW} + d_{TR} + d_{UL})}$  constructed as

$$T = [\tau_1 \quad \tau_2 \quad \tau_3]^T = [\alpha_{PW}\hat{\sigma}_{PW} \quad \alpha_{TR}\hat{\sigma}_{TR} \quad \alpha_{UL}\hat{\sigma}_{UL}], \quad (16)$$

where  $\alpha_{PW}$ ,  $\alpha_{TR}$ ,  $\alpha_{UL} \in \mathbb{R}^{n_G=3}$  are defined in eq. (2). Thereafter, we exploit the training set  $\bar{E}_T$  and label  $T$  to train a DNN for sEMG-based robot hand multi-grasp control. Importantly, note that the label  $T$  of the training set  $\bar{E}_T$  is automatically extracted from the sEMG calibration data, allowing to train the DNN in a self-supervised manner as detailed in the following.

Let us consider the vector of online instantaneous sEMG signal  $E(t) = [e_1(t) \dots e_8(t)]^T$  provided as input to a DNN architecture, as depicted in Fig. 2. The network is composed by  $n$  hidden layers and an output layer. The generic  $j$ -th

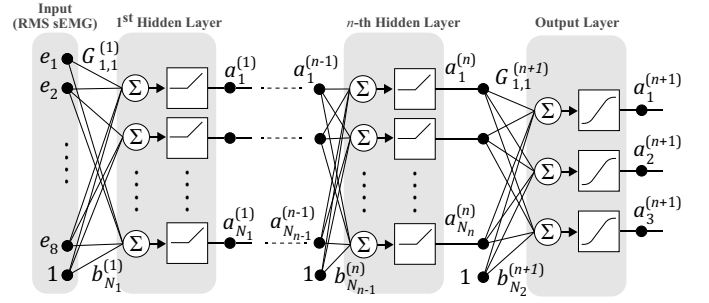


Fig. 2: DNN architecture for the self-supervised regression.

hidden layer of the DNN contains  $N_j$  neurons with Rectified Linear Activation Unit (ReLU) activation function  $\mathcal{F}(\cdot)$ , and bias vector  $b^{(j)} \in \mathbb{R}^{N_j}$ . The input vector  $a^{(j-1)}(t) \in \mathbb{R}^{N_{j-1}}$  coincides with the output of the  $(j-1)$ -th hidden layer, characterized by  $N_{j-1}$  neurons. Accordingly, the output vector of the  $j$ -th hidden layer  $a^{(j)}(t) \in \mathbb{R}^{N_j}$  is given by

$$a^{(j)}(t) = \mathcal{F}(G^{(j)} a^{(j-1)}(t) + b^{(j)}). \quad (17)$$

This structure describes each hidden layer, except for the first one in which a weight matrix  $G^{(1)} \in \mathbb{R}^{N_1 \times N_{in}}$ , with  $N_{in} = 8$ , is applied to the input  $E(t) \in \mathbb{R}^8$ . The output layer is characterized by  $N_{n+1} = 3$  neurons, a weight matrix  $G^{(n+1)} \in \mathbb{R}^{N_{n+1} \times N_n}$  and a sigmoid activation function  $\mathcal{S}(\cdot)$ . Thus, the output vector  $a^{(n+1)}(t)$  of the DNN is given by

$$a^{(n+1)}(t) = \begin{bmatrix} a_1^{(n+1)}(t) & a_2^{(n+1)}(t) & a_3^{(n+1)}(t) \end{bmatrix}^T = \mathcal{S}(G^{(n+1)} a^{(n)}(t) + b^{(n+1)}) \quad (18)$$

where  $a_1^{(n+1)}(t)$ ,  $a_2^{(n+1)}(t)$  and  $a_3^{(n+1)}(t)$  are the three scalar outputs of the network, and  $a^{(n)}(t) \in \mathbb{R}^{N_n}$  and  $b^{(n+1)} \in \mathbb{R}^{N_{n+1}}$  are the input and bias vectors of the output layer. The objective of the network introduced so far is to train the weight matrices and bias vectors such that the outputs of the network  $a_1^{(n+1)}(t)$ ,  $a_2^{(n+1)}(t)$  and  $a_3^{(n+1)}(t)$  allow to control the closure level of power, tripodal and ulnar grasping motions of the robot hand. To this purpose, the network training can be performed through the scaled conjugate gradient back-propagation algorithm with mean squared error (MSE) as loss function, using as training set the matrix  $\bar{E}_T$  previously introduced in eq. (15), and as label the target outputs  $T = [\tau_1 \quad \tau_2 \quad \tau_3]^T$  defined as described in eq. (16). Once the training is carried out, the control of the robot hand is realized by imposing, in eq. (1), the vector of grasp synergy activations as

$$\alpha(t) = \begin{bmatrix} a_1^{(n+1)}(t) & a_2^{(n+1)}(t) & a_3^{(n+1)}(t) \end{bmatrix}^T. \quad (19)$$

## III. EXPERIMENTS AND RESULTS

### A. Subjects

We recruited 10 healthy subjects (age:  $30 \pm 4.2$ , right-handed: 9 subj.s, left-handed: 1 subj.s). Five subjects were involved in an offline experimental session (see Sec. III-B), for systematic evaluations of the proposed self-supervised regression, in order to perform comparisons with the single-NMF and concatenated-NMF approaches, and considering three different simulated robot hands (refer to Sec. II-A2). The other five subjects were involved in an online experimental session (see Sec. III-C), in which they were required to online control the real AR10 Robot Hand (see Fig. 5) in several

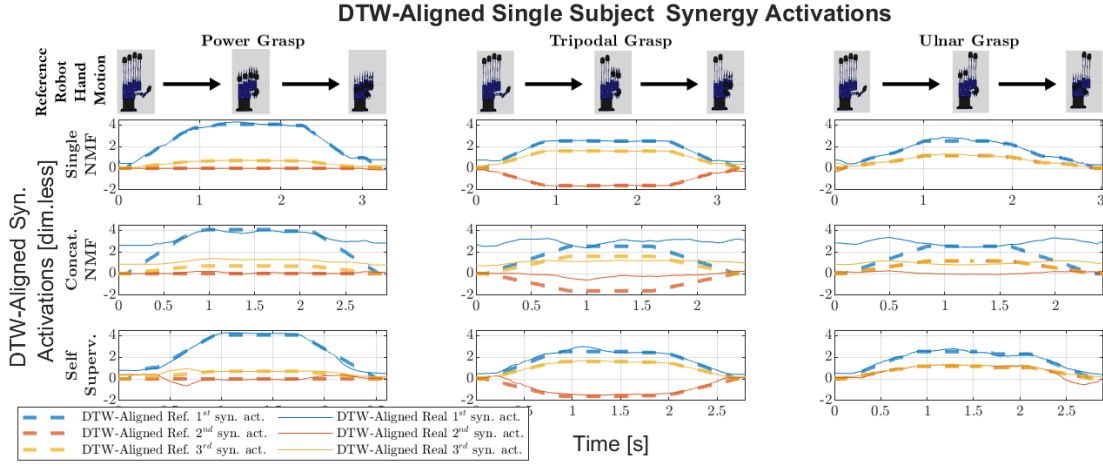


Fig. 3: Single subject reference and estimated DTW-aligned AR10 synergy activations (i.e.  $\alpha(t)$  in eq. (1)).

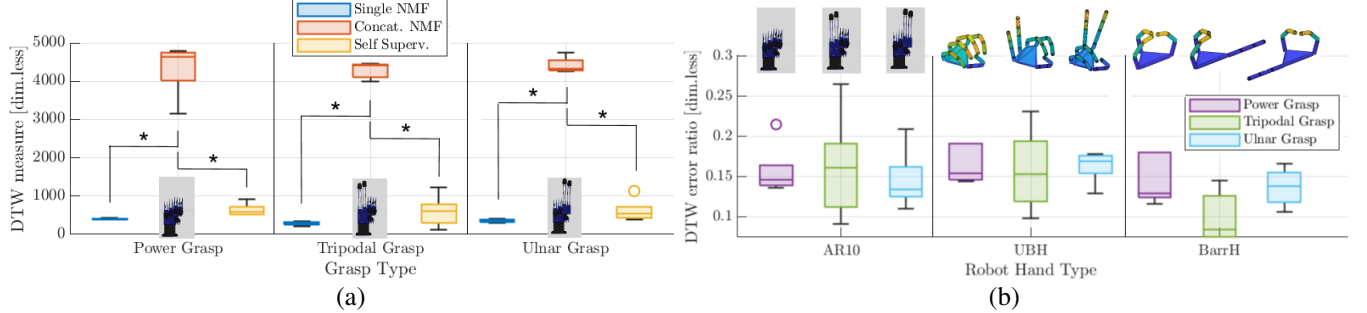


Fig. 4: (a) Mean DTW measure between reference and estimated AR10 synergy activations for all subjects. “\*” indicates statistically significant difference. (b) DTW error ratio (eq. (20)) for all subjects, grouped by type of grasp and simulated robot hand. The two groups of subjects were formed randomly. None of the subjects had previous experience with the system and sEMG. Experiments were conducted in compliance of the Declaration of Helsinki, and participants signed an informed consent form.

### B. Offline Experimental Session

The involved subjects were asked to replicate six times the following sequence (while sEMG signals were recorded): continuous modulation of the power grasp from the minimum closure level (open hand) to the maximum closure level and then back to the open hand, then followed by the same continuous modulation of the tripodal and ulnar grasps. Note that the motion of the reference virtual hand on the screen was exploited to retrieve the (simulated) robot hand synergy activation references for the offline systematic evaluations and comparisons, see Fig. 3, as reported in the following section.

1) *Systematic Evaluation of Regression Methods*: Three nested cross-validations (nCV) were carried out independently for each of the considered regression methods, i.e. single-NMF, concatenated-NMF and the proposed self-supervised regression, using the sEMG datasets obtained as explained in the previous subsection. The nCV was performed in a subject-specific paradigm, meaning that the nCV carried out for each regression method was separately conducted for each of the subjects. The nCV was designed to minimize biases and/or artificial overestimations of the results, and was composed of the following steps:

- (i) the sEMG dataset – constituted by 6 repetitions of the power-tripodal-ulnar motion – was partitioned in 6 dif-

ferent combinations of a subset of 5 motion repetitions plus a subset of 1 motion repetition;

- (ii) for each of these partitions, the subset of 5 motion repetitions was used to perform a 5-fold CV (with each fold containing one power-tripodal-ulnar motion repetition) to conduct a grid-search for the selection of the regression model hyper-parameters, obtaining a total of 5 trained regression models. Therefore, this step constituted the *inner nested loop* of the nCV;
- (iii) thereafter, for each of the dataset partitions, the performance of *each* of the 5 models trained in the inner nested loop was evaluated on the remaining external subset containing 1 motion repetition (i.e., the test set), resulting in 5 different model evaluations. The metrics used to evaluate this performance was the Dynamic Time Warping (DTW) similarity measure between the model outputs and the reference synergy activations (see previous Sec. III-A and Fig. 3), since it is a distance measure particularly suited for sEMG-based s/p control [5];
- (iv) this evaluation of the 5 “inner” models on the external test set was repeated 6 times, for each of the 6 partitions of the dataset, constituting the *outer loop* of the nCV;
- (v) once outer and inner loop iterations were completed for a specific regression method and subject, a total of 30 DTW evaluations of as many trained models were available. Finally, the mean value over these 30 DTW measures was computed, constituting the result of the nCV for a specific regression method and subject.

The nCV was therefore exploited for the evaluation of the single-NMF, concatenated-NMF and proposed self-supervised



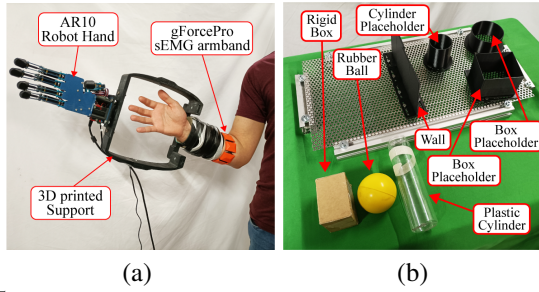


Fig. 5: (a) Wearable sEMG-based robot hand setup. (b) Setup for the grasp-transportation-release online experiments.

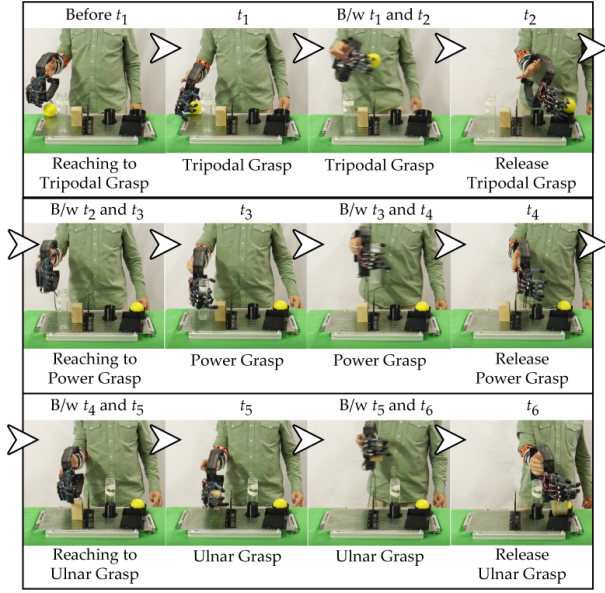


Fig. 6: Online grasp-transportation-release task.  $t_1, \dots, t_6$  refer to time instants in Fig. 7(b).

regression approaches by adequately arrange the offline sEMG dataset in accordance with Sec. II-B1 (single-NMF), Sec. II-B2 (concatenated-NMF) and Sec. II-C (self-supervised regression). The nCV and DNN code has been released at the repository: <https://bit.ly/3BbJDZ8>.

2) *Results of the Offline Systematic Evaluation:* In Fig. 3, it is possible to observe how the DTW-aligned [5] robot hand synergy activations estimated by the single-NMF approach resembled the reference synergy activations with high fidelity. On the other hand, by looking at the middle row of Fig. 3, it can be clearly observed that the references were very badly followed by the estimated values. This behaviour confirms the critical drop in regression performances of the concatenated-NMF multi-grasp regression. Conversely, in the bottom row of Fig. 3, the proposed self-supervised regression approach follow very well the references of all grasps, showing to be able to overcome the performance degradation of concatenated-NMF. The single subject results are also confirmed by the results obtained considering all the subjects, reported in the boxplot of Fig. 4(a). Incidentally, it is important to note that the single-NMF is a regression approach that operates only with single grasps, and therefore it cannot be compared online with other regression methods able to deal with multiple grasping motions.

*Statistical analysis of offline results:* A two-way repeated measure Analysis of Variance (ANOVA) was carried out on

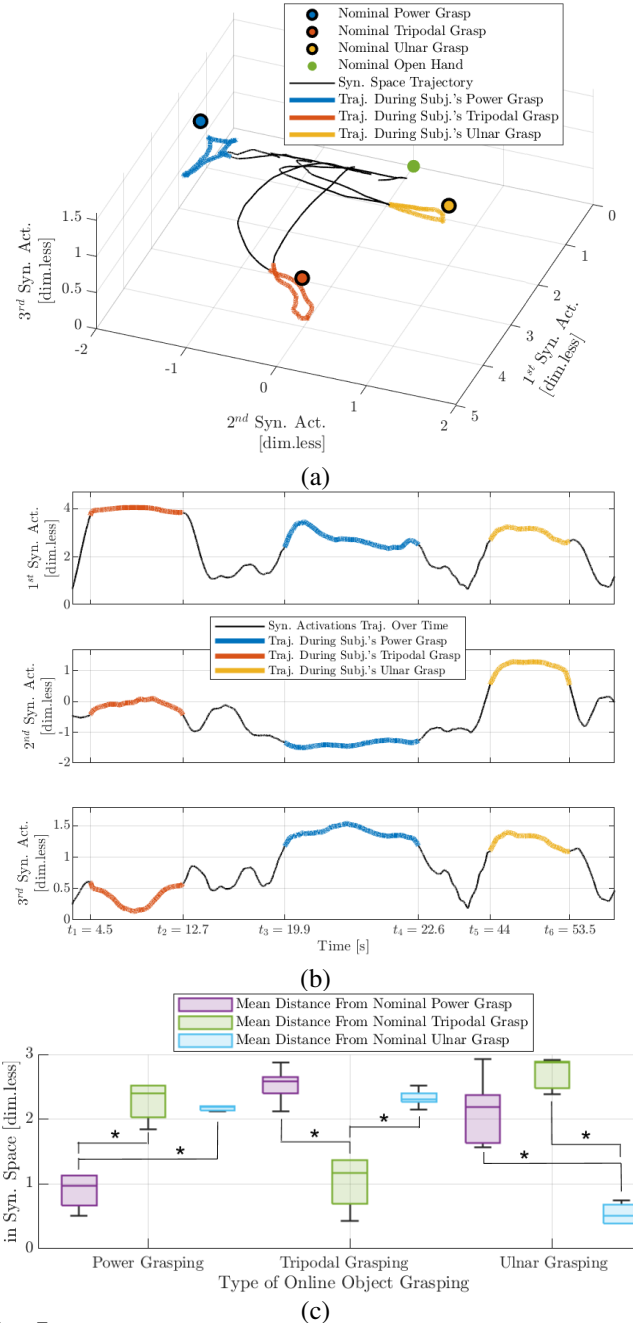


Fig. 7: Single subject online results for one grasp-transportation-release task. (a) Grasp modulation in the synergy activation subspace (1<sup>st</sup>, 2<sup>nd</sup> and 3<sup>rd</sup> synergy activations correspond to  $\alpha_1, \alpha_2$  and  $\alpha_3$  in eq. (1)). (b) Synergy activations plotted along time. (c) Mean value of the Euclidean distance from nominal grasps in the synergy activations subspace, for all subjects. “\*” indicates statistically significant difference.

the results reported in Fig. 4(a) for the factors *Grasp Type* and *Regression Method*. The statistical significance was set to  $p < .05$ . The ANOVA revealed a statistically significant influence of *Regression Method* ( $F(2, 36) = 76.85, p < .001$ ), whereas no significant influence was reported for the *Grasp Type* and the factor interaction. Therefore, a Tukey Test was performed for pairwise comparisons, revealing a statistically significant difference only between the concatenated-NMF approach and the other two approaches. This demonstrates that the self-supervised regression presented statistically signifi-

cantly better performances with respect to the concatenated-NMF. We then performed a further statistical evaluation of the offline experimental session, taking into consideration three different simulated robot hands: (i) a ROS-based simulator of the AR10, (ii) a SynGrasp-based simulator of the UBHand (anthropomorphic robot hand), and (iii) a SynGrasp-based simulator inspired to the Barrett Hand (3-fingered robotic gripper). In this case, the mean value of the DTW measure obtained for each subject from the nCV – namely  $m_{DTW}$  – was normalized for results comparison reasons, computing the *DTW error ratio*  $e_{DTW, \text{ratio}}$  as

$$e_{DTW, \text{ratio}} = \frac{m_{DTW}}{z_{DTW}}, \quad (20)$$

where  $z_{DTW}$  is the DTW measure computed between the reference synergy activations of a specific grasping motion and the synergy activations corresponding to constantly keeping the open hand configuration. Fig. 4(b) reports the boxplot of the DTW error ratios for all subjects, on which a two-way repeated measure ANOVA was conducted, investigating the factors *Robot Hand Type* and *Grasp Type*. Statistical significance was set to  $p < .05$ . The ANOVA revealed no statistically significant influence for both *Robot Hand Type* and *Grasp Type* factors, as well as for the factor interaction (Fig. 4(b)). This demonstrates that the positive performances of the proposed sEMG-based self-supervised regression were not biased to a specific robot hand kinematic structure.

### C. Online Experimental Session

1) *Grasp-Transportation-Release Task*: Each subject was instructed to put on the wearable setup shown in Fig. 5(a) and perform two repetitions of the power, tripodal and ulnar opening/closing grasping motions while the sEMG data was acquired in order to train the self-supervised DNN according to Sec. II-C. Thereafter, based on the specific setup shown in Fig. 5(b), the subjects were required to: (i) grasp three different objects, one at a time, from the right side; (ii) transport the objects towards the opposite side, climbing over a 20 cm wall; (iii) release each object inside the correct placeholder-box. The objects were a small rigid box ( $7 \times 7 \times 19$  cm), a plastic cylinder ( $5 \times 5 \times 25$  cm) and a soft rubber ball ( $8 \times 8 \times 8$  cm), which mandatory required to use ulnar, power and tripodal grasps, respectively. The task was repeated 5 times by each subject with random objects order.

2) *Results of the Grasp-Transportation-Release Task*: In Fig. 6, a photo sequence of the online grasping task is reported. Fig. 7(a) reports the modulation, by means of the proposed self-supervised regression, of the trajectory in the synergy activations subspace. In particular, the green, blue, red and yellow black-edged circles represent the nominal open hand, power, tripodal and ulnar robot hand configurations. Therefore, it is possible to appreciate in Fig. 7(a) how the subject naturally moved to the neighborhoods of the power, tripodal and ulnar grasp configurations. We also report in Fig. 7(b) the the synergy activations along the time axis. Considering aggregated results, Fig. 7(c) reports, for each subject, the mean value of the Euclidean distance between the robot hand synergy activations modulated during the object grasping phases (i.e., between  $t_1-t_2$ ,  $t_3-t_4$  and  $t_5-t_6$  in Fig. 7(c)) and the respective

nominal grasp in the synergy activations subspace, computed over the five task repetitions, and grouped for the different types of grasping and distances from nominal grasps.

*Statistical analysis of online results*: A two-way repeated measure ANOVA was performed on the results reported in Fig. 7(c) for the factors *Online Object Grasping Type* and *Distance From Nominal Grasp Type*. Statistical significance was set to  $p < .05$ . The ANOVA revealed a statistical significant influence of the interaction between *Distance From Nominal Grasp Type* and *Online Object Grasping Type* ( $F(4, 33) = 55.76$ ,  $p < .001$ ), whereas no significant influence of the single factors was reported. A Tukey Test was performed for pairwise comparisons, revealing that for all subjects the distance from the correct nominal grasps was statistically significantly lower than the distance from the other nominal grasps.

## IV. DISCUSSION

*Implications of the work*: The proposed self-supervised method allows to avoid the burden for the labeling of sEMG data, which is a complex and frustrating procedure. This study also demonstrates the viability of the proposed method for robot hands with dissimilar kinematic structures. Furthermore, our approach also implies a more reliable and natural sEMG-based multi-grasp control of robot hands with respect to previously proposed unsupervised regression methods, mainly limited to the decoding of wrist motions.

*Comparison to existing literature*: We first of all consider supervised regression approaches, since they constitute a benchmark of regression performance in literature. To this aim, we select three remarkable studies reporting for the following metrics of similarity between predictions and ground truth: in [21], an  $R^2$  value within the range of 0.8–0.9 was reported using a method based on Kernel Ridge Regression (KRR); in [22], a normalized mean squared error (nMSE) within the range of 0.2–0.3 was obtained employing Kernel Ridge Regression (KRR); and, finally, in [23], a root mean squared error (RMSE) within the range of 0.07–0.08 was reported using Long Short-Term Memory (LSTM) neural networks. For comparison purposes, we report that the results shown in Fig. 4(a) correspond to an  $R^2$  value, nMSE, and RMSE of 0.8423, 0.1355, and 0.0735, respectively, averaged over all the subjects, grasp types and repetitions. Therefore, the outcomes achieved through the proposed self-supervised method approach the levels of error observed in the selected literature works. Secondly, for the consideration of literature works using unsupervised/semi-supervised methods, a qualitative comparison is reported, due to the intrinsic lack of a ground truth for metrics comparison. We therefore report in Table I the features of three selected sEMG-based unsupervised regression approaches for robot hand control, along with our proposed method. As can be seen in the table, the proposed self-supervised approach is the only one providing nonlinear fitting capabilities, allowing to actually decode more complex actions like multiple grasping motions.

*Possible limitations*: Firstly, possible limitations regard the fact that the variability of the sEMG signals due to long time usage of the system was not considered in the context of this specific study. Indeed, the effects on the sEMG of aspects

TABLE I: Feature comparison between proposed method and representative sEMG-based unsupervised regression approaches.

Ref.	Regression Method	Nonlinear Fitting	Decoded Actions	Experimental Protocol
[9]	Quasi-unsupervised (NMF with sparseness constraints)	No	Wrist flex/ext, rad/uln deviation	Online virtual target reaching assessment
[10]	Unsupervised Adaptive (Incremental NMF guided by sparseness constraints)	No	Wrist flex/ext, rad/uln deviation	Online virtual target reaching assessment and clothespins relocation with real robot hand
[11]	Autoencoder	No	Wrist flex/ext, rad/uln deviation	Online virtual target reaching assessment
Proposed approach	Self-supervised (NMF combined with DNN)	Yes	Multiple grasps (Power, tripod, ulnar grasps)	Offline DTW-based assessment with multiple virtual hands and online grasp-transportation-release task with real robot hand

like muscle fatigue, mental tiredness, skin perspiration and even limb/body postures could be accounted by extending the proposed HRi to an adaptive version capable of retraining with new sEMG data in an incremental fashion. Secondly, other possible limitations of the present study regard the fact that experiments were conducted only on healthy subjects, without involving amputees. Indeed, amputees typically show different muscle activation patterns and residual limb characteristics, and therefore a dedicated evaluation of the accuracy of the proposed self-supervised regression method is needed. Additionally, for experiments involving amputees, it will be crucial to conduct a proper clinical validation to test required safety, reliability, and performance standards.

### V. CONCLUSIONS

The present study investigated the development of sEMG-based control strategies for robot hands avoiding explicit labelling procedures, by combining NMF with DNN for self-supervised regression of sEMG signals. The study reports for experiments with 10 healthy subjects, and demonstrates the effectiveness of the proposed approach in both offline evaluations and online real-time control of a wearable anthropomorphic robot hand. The results report for a high reliability over repeated grasp-transportation-release tasks with different objects. Overall, this work contributes to the development of more advanced and effective sEMG-based control strategies in telemanipulation, prosthetics and teaching by demonstration scenarios.

### REFERENCES

- [1] R. Meattini, D. Chiaravalli, L. Biagiotti, G. Palli, and C. Melchiorri, "Combining unsupervised muscle co-contraction estimation with bio-feedback allows augmented kinesthetic teaching," *IEEE Robotics and Automation Letters*, vol. 6, no. 4, pp. 6180–6187, 2021.
- [2] E. Scheme and K. Englehart, "Electromyogram pattern recognition for control of powered upper-limb prostheses: state of the art and challenges for clinical use," *Journal of Rehabilitation Research & Development*, vol. 48, no. 6, 2011.
- [3] A. Fougner, Ø. Stavdahl, P. J. Kyberd, Y. G. Losier, and P. A. Parker, "Control of upper limb prostheses: Terminology and proportional myoelectric control—a review," *IEEE Transactions on neural systems and rehabilitation engineering*, vol. 20, no. 5, pp. 663–677, 2012.
- [4] A. Ameri, E. N. Kamavuako, E. J. Scheme, K. B. Englehart, and P. A. Parker, "Support vector regression for improved real-time, simultaneous myoelectric control," *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, vol. 22, no. 6, pp. 1198–1209, 2014.
- [5] R. Meattini, A. Bernardini, G. Palli, and C. Melchiorri, "semg-based minimally supervised regression using soft-dtw neural networks for robot hand grasping control," *IEEE Robotics and Automation Letters*, vol. 7, no. 4, pp. 10144–10151, 2022.
- [6] N. Jiang, K. B. Englehart, and P. A. Parker, "Extracting simultaneous and proportional neural control information for multiple-dof prostheses from the surface electromyographic signal," *IEEE transactions on Biomedical Engineering*, vol. 56, no. 4, pp. 1070–1080, 2008.
- [7] D. Farina, N. Jiang, H. Rehbaum, A. Holobar, B. Graimann, H. Dietl, and O. C. Aszmann, "The extraction of neural information from the surface emg for the control of upper-limb prostheses: emerging avenues and challenges," *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, vol. 22, no. 4, pp. 797–809, 2014.
- [8] D. Seung and L. Lee, "Algorithms for non-negative matrix factorization," *Advances in neural information processing systems*, 2001.
- [9] C. Lin, B. Wang, N. Jiang, and D. Farina, "Robust extraction of basis functions for simultaneous and proportional myoelectric control via sparse non-negative matrix factorization," *Journal of neural engineering*, vol. 15, no. 2, p. 026017, 2018.
- [10] D. Yeung, I. M. Guerra, I. Barner-Rasmussen, E. Siponen, D. Farina, and I. Vujaklija, "Co-adaptive control of bionic limbs via unsupervised adaptation of muscle synergies," *IEEE Transactions on Biomedical Engineering*, vol. 69, no. 8, pp. 2581–2592, 2022.
- [11] I. Vujaklija, V. Shalchyan, E. N. Kamavuako, N. Jiang, H. R. Marateb, and D. Farina, "Online mapping of emg signals into kinematics by autoencoding," *Journal of neuroengineering and rehabilitation*, 2018.
- [12] Y. LeCun, Y. Bengio, and G. Hinton, "Deep learning," *nature*, 2015.
- [13] A. O. Perotto, *Anatomical guide for the electromyographer: the limbs and trunk*. Charles C Thomas Publisher, 2011.
- [14] T. Feix, J. Romero, H.-B. Schmiedmayer, A. M. Dollar, and D. Kragic, "The grasp taxonomy of human grasp types," *IEEE Transactions on human-machine systems*, vol. 46, no. 1, pp. 66–77, 2015.
- [15] M. Santello, M. Bianchi, M. Gabbicini, E. Ricciardi, G. Salvietti, D. Prattichizzo, M. Ernst, A. Moscatelli, H. Jörmell, A. M. Kappers *et al.*, "Hand synergies: integration of robotics and neuroscience for understanding the control of biological and artificial hands," *Physics of life reviews*, vol. 17, pp. 1–23, 2016.
- [16] M. Gabbicini, A. Bicchì, D. Prattichizzo, and M. Malvezzi, "On the role of hand synergies in the optimal choice of grasping forces," *Autonomous Robots*, vol. 31, no. 2-3, p. 235, 2011.
- [17] M. Malvezzi, G. Gioioso, G. Salvietti, and D. Prattichizzo, "Syngasp: A matlab toolbox for underactuated and compliant hands," *IEEE Robotics & Automation Magazine*, vol. 22, no. 4, pp. 52–68, 2015.
- [18] C. Melchiorri, G. Palli, G. Berselli, and G. Vassura, "Development of the ub hand iv: Overview of design solutions and enabling technologies," *IEEE Robotics & Automation Magazine*, 2013.
- [19] W. Townsend, "The barretthand grasper—programmably flexible part handling and assembly," *Industrial Robot: an international journal*, vol. 27, no. 3, pp. 181–188, 2000.
- [20] G. Salvietti, M. Malvezzi, G. Gioioso, and D. Prattichizzo, "On the use of homogeneous transformations to map human hand movements onto robotic hands," in *2014 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2014, pp. 5352–5357.
- [21] J. M. Hahne, F. Biessmann, N. Jiang, H. Rehbaum, D. Farina, F. C. Meinecke, K.-R. Müller, and L. C. Parra, "Linear and nonlinear regression techniques for simultaneous and proportional myoelectric control," *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, vol. 22, no. 2, pp. 269–279, 2014.
- [22] A. Gijsberts, R. Bohra, D. Sierra González, A. Werner, M. Nowak, B. Caputo, M. A. Roa, and C. Castellini, "Stable myoelectric control of a hand prosthesis using non-linear incremental learning," *Frontiers in neurobotics*, vol. 8, p. 8, 2014.
- [23] A. E. Olsson, N. Malešević, A. Björkman, and C. Antfolk, "End-to-end estimation of hand-and wrist forces from raw intramuscular emg signals using lstm networks," *Frontiers in Neuroscience*, vol. 15, 2021.